




PWD

**PWD API 610 BB1
Single Stage Pump**

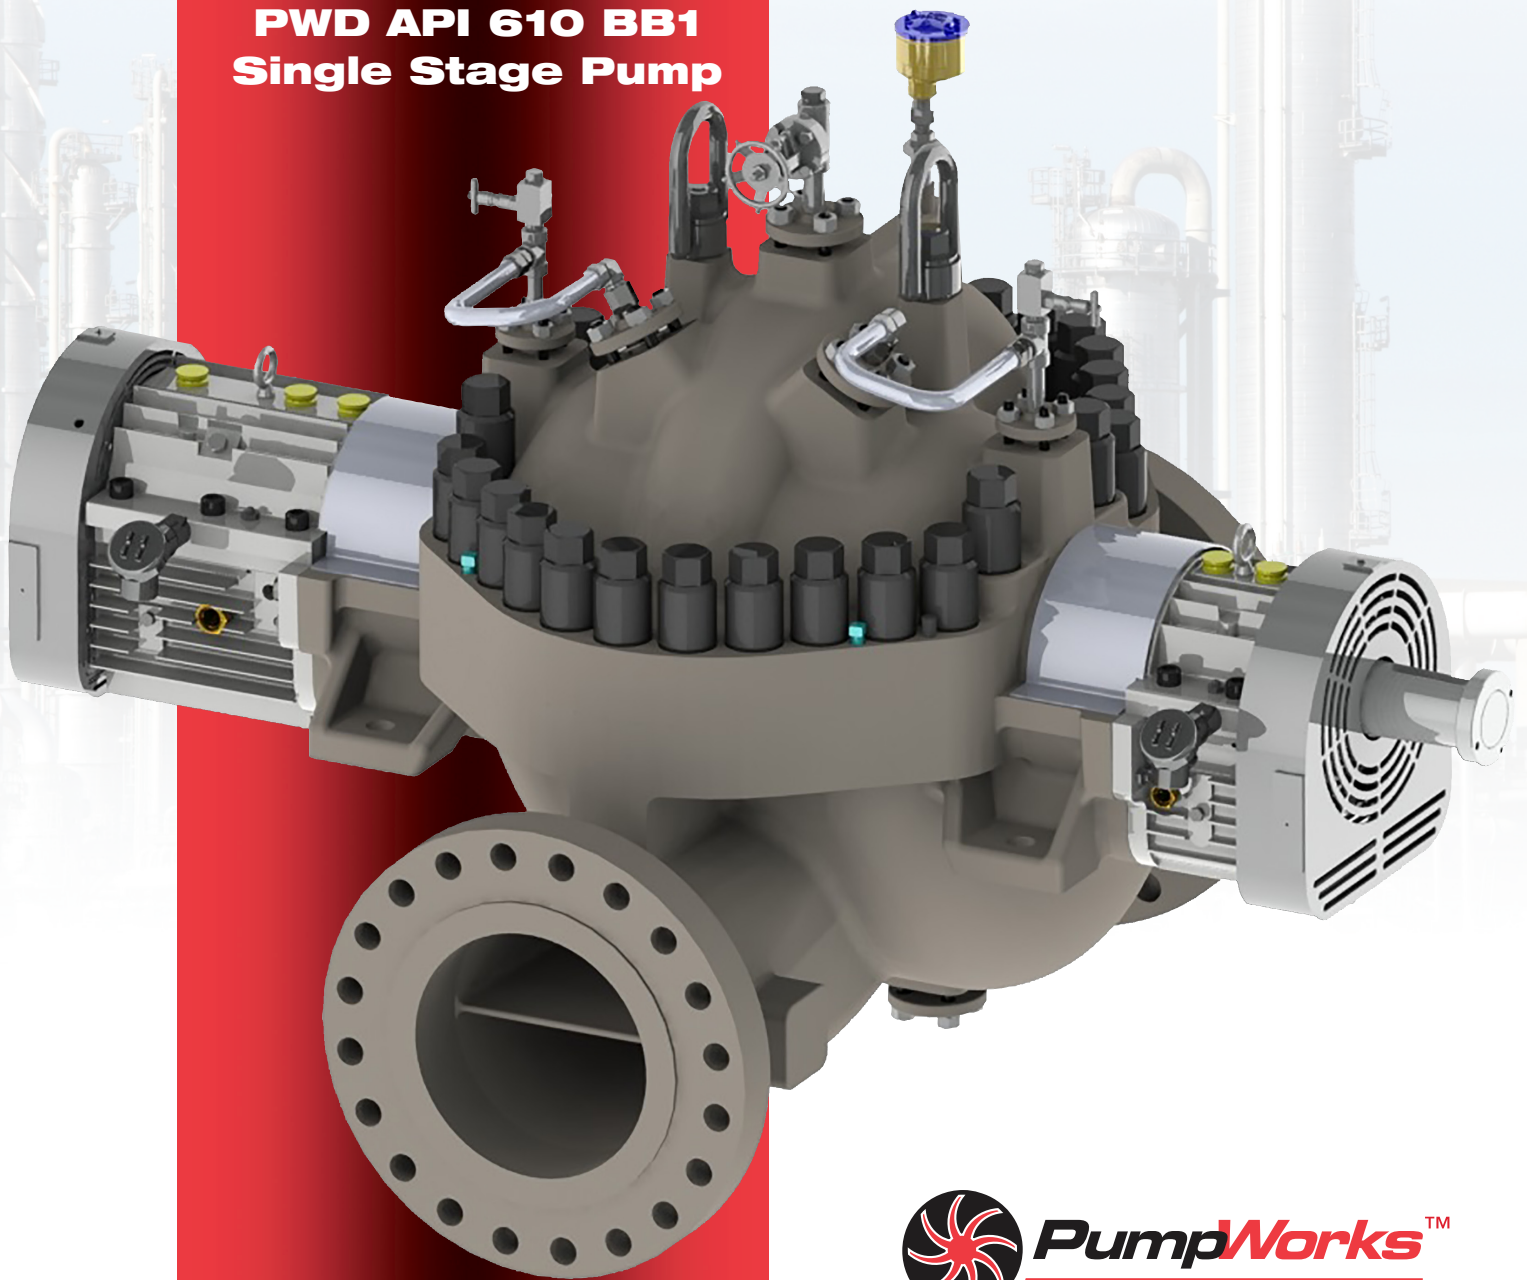


PWD API 610 BB1 SINGLE STAGE PUMP

HYDRAULIC PERFORMANCE COVERAGE


50 Hz Performance Coverage

Visit our web site at www.pumpworks.com and specify flow and performance needs and obtain pump selection, performance curve, drawing, and data sheet.

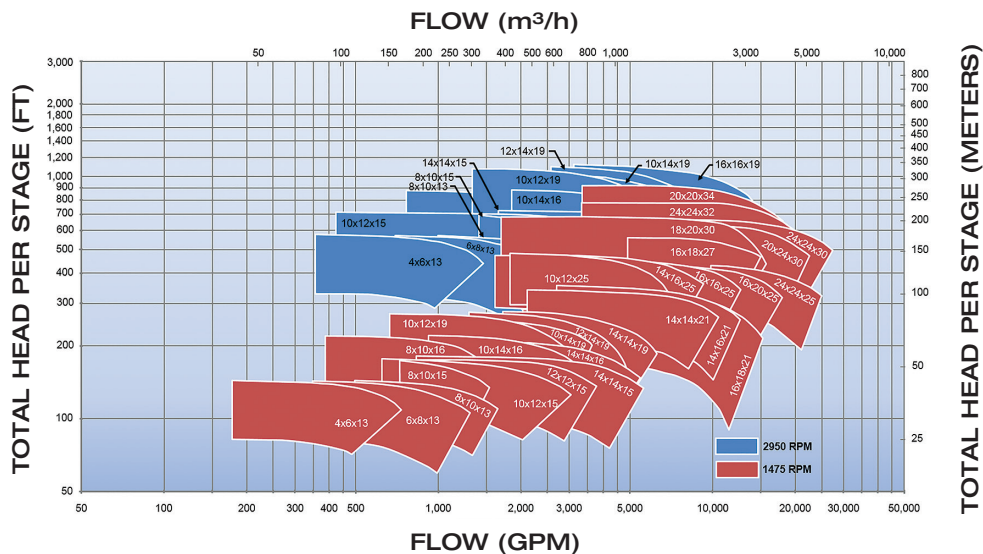

60 Hz Performance Coverage

Visit our web site at www.pumpworks.com and specify flow and performance needs and obtain pump selection, performance curve, drawing, and data sheet.

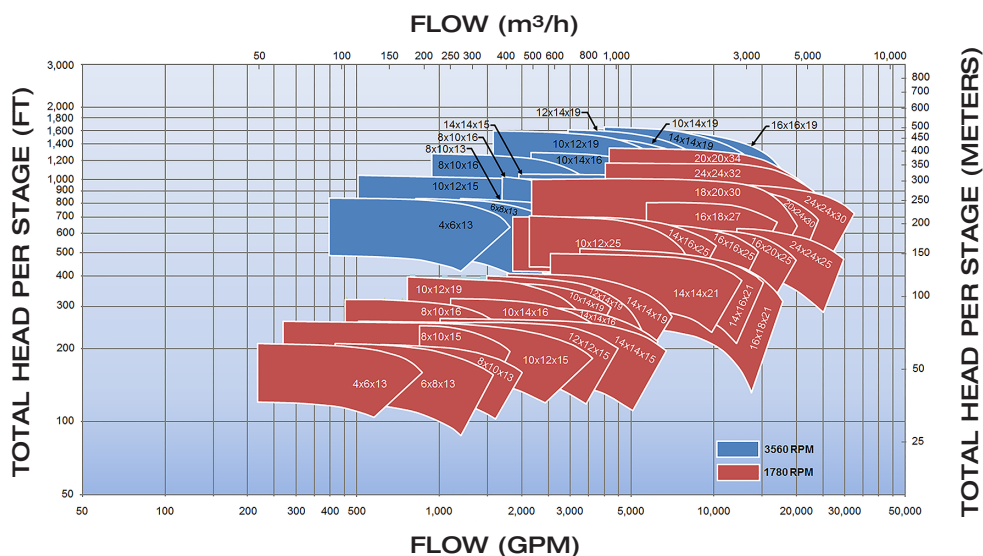

Performances shown are normal and are to be used for preliminary selection only.

STANDARD MATERIALS OF CONSTRUCTION

API MATERIAL CLASS	S-4	S-6	S-8	C-6	A-8
CASING	A-216 GRADE WCB	A216 GRADE WCB	A216 GRADE WCB	A487 GRADE CA6NM	A351 GRADE CF3M
IMPELLER	A-216 GRADE WCB	A487 GRADE CA6NM	A743 GRADE CF3M	A743 GRADE CA6NM	A743 GRADE CF3M
SHAFT	ASTM A276 TYPE 410 SS	ASTM A276 TYPE 410 SS	A479 TYPE XM-19	A276 TYPE 410 SS	A479 TYPE XM-19
BEARING HOUSING	GRADE WCB	A216 GRADE WCB CARBON STEEL	A216 GRADE WCB	A216 GRADE WCB	A216 GRADE WCB
IMPELLER WEAR RINGS	CAST IRON	262-302 BHN: 410 SS HT	316 SS HARD FACED	410 SS HT; 255-302 BHN	316 SS HARD FACED
CASING WEAR RINGS	CAST IRON	400-450 BHN: 420 SS HT	316 SS HARD FACED	420 SS; 400-450 BHN	316 SS HARD FACED
THROAT BUSHING	CAST IRON	410 SS HT: 262-302 BHN	316 SS HARD FACED	410 SS HT; 255-302 BHN	316 SS HARD FACED
CASING STUDS	A-193 GRADE B-7	A193 GRADE B-7	A193 GRADE B-7	A193 GRADE B-7	A193 GRADE B-7
CASING NUTS	A-194 GRADE 2H	A194 GRADE 2H	A194 GRADE 2H	A194 GRADE 2H	A194 GRADE 2H

*Other API 610 Material Classes and Combinations are available including D-1 and D-2.

PWD API 610 BB1 SINGLE STAGE PUMP

DESIGN FEATURES AND BENEFITS

● Bearing Housing

- Finned design improves heat dissipation for cooler running bearing
- Large bearing housing easily accommodates vibration switches, transmitters and proximity probes
- Optional sleeve/KTB (pivot shoe) bearing designed to handle variety of RTDs

● Double Volute

- Precision cast hydraulic passageways minimize radial thrust for less shaft deflection and bearing loading

● Impeller

- Precision cast for maximum efficiency
- Dynamically balanced for smooth operation to 4W/N before mounting
- Keyed to the shaft
- Double suction large eye impeller for lower NPSH performance

● Quality

- Manufactured and tested in the USA

● Flanges


- ANSI 816 T Class 600# RF suction and discharge flanges
- Optional 300#/900#

● Nozzles

- Cast integrally in the lower half casing, permitting disassembly without disturbing piping connections

● Labyrinth Oil Seal

- INPRO™ bearing isolators to provide optimum bearing housing environment

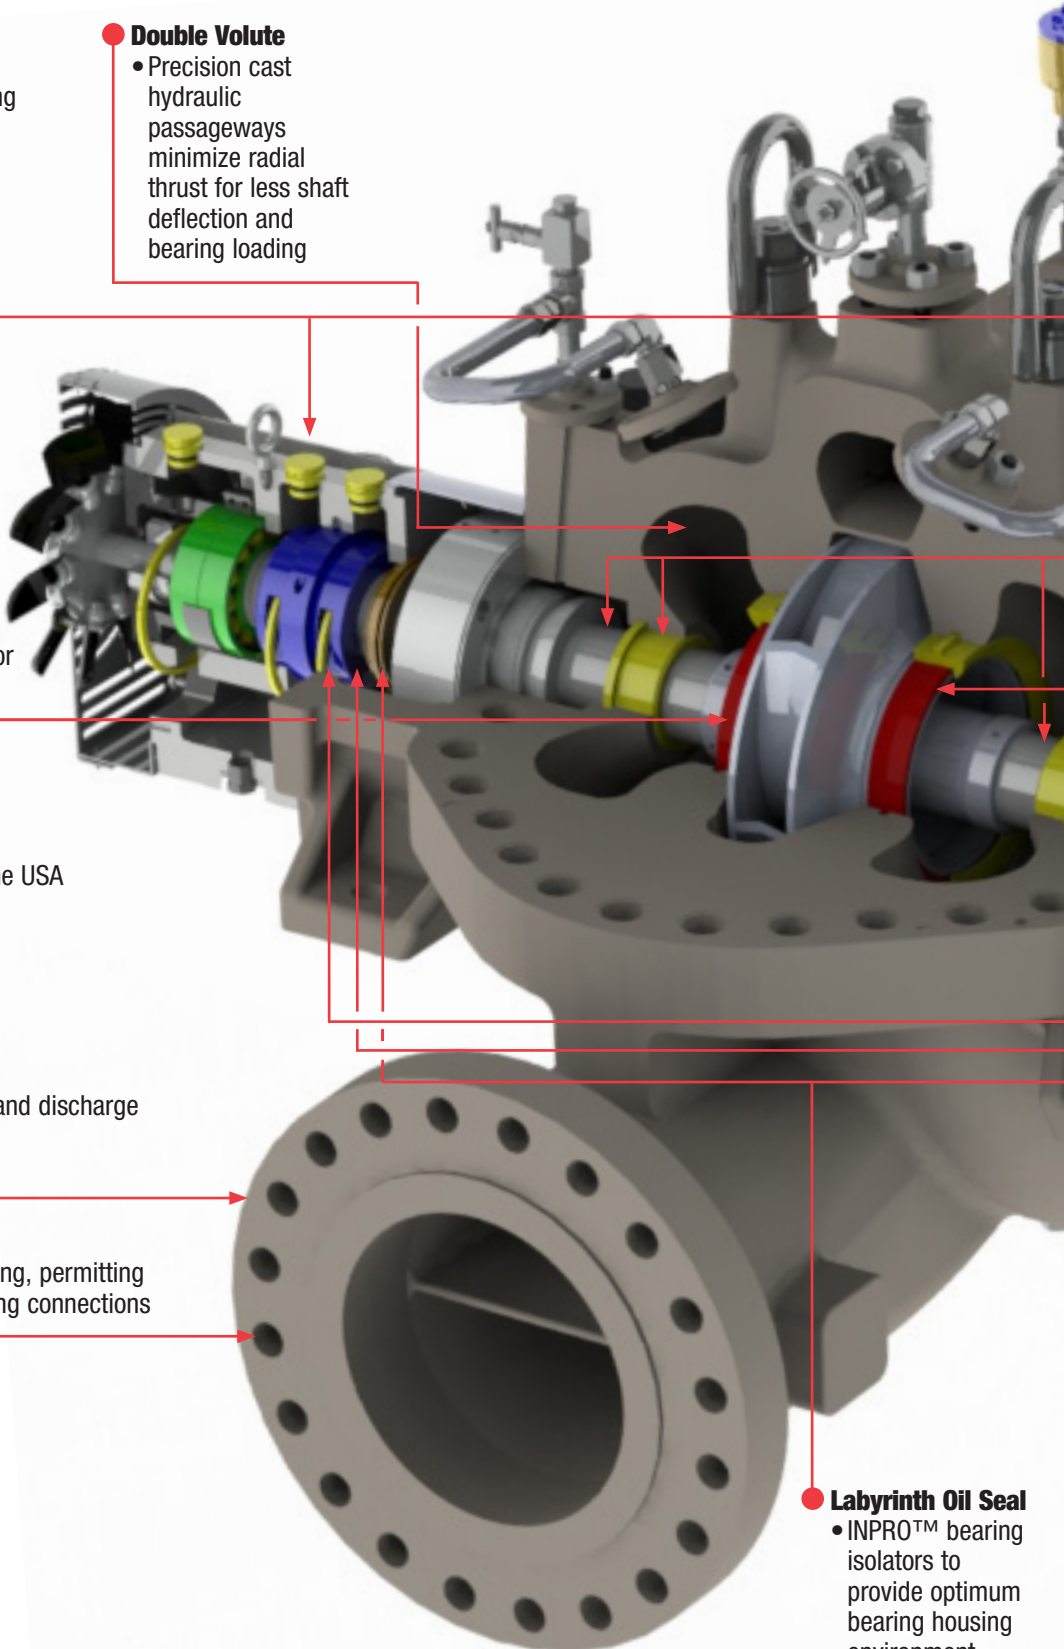

PWD API 610 CONSTRUCTION BB1 SINGLE STAGE PUMP

Renewable Wear Rings

- All wear rings are replaceable permitting re-establishing initial distances and efficiency
- Positively locked

Seal Chamber

- API 610 seal chamber allows user to install any API 682 cartridge seal to meet process requirements
- Renewable throat bushing for controlled seal chamber environment

Delivery

- 28 weeks for API 610 material class S-4, S-6, S-8, C-6 and A-8
- Refer to the factory on deliveries for other API material classes and customer specific material combinations

ePOD Pump Selector

- Access to end users and specifiers to select and configure your pump application on line at www.pumpworks.com

Casing

- Mounting feet cast integral into the bottom half providing near centerline mounting to minimize thermal growth in hot service
- Wide foot design to minimize effects of forces and moments imposed by the system piping
- Meets API-610 2x nozzle loads
- Hydrostatic test of pressure containing partos to 1.5 MAWP
- Socket welded and flange case vents and drains

Bearing Design


- Ball/Ball
- Standard Sleeve/Ball
- Optional Sleeve/Kingsbury

Bearing Lubrication

- Ring oil lubrication to ensure effective lubrication
- Optional pure or purge mist lubrication
- Optional force feed pressure lubrication

PWD API 610 BB1 SINGLE STAGE PUMP

OUTLINE DIMENSIONS

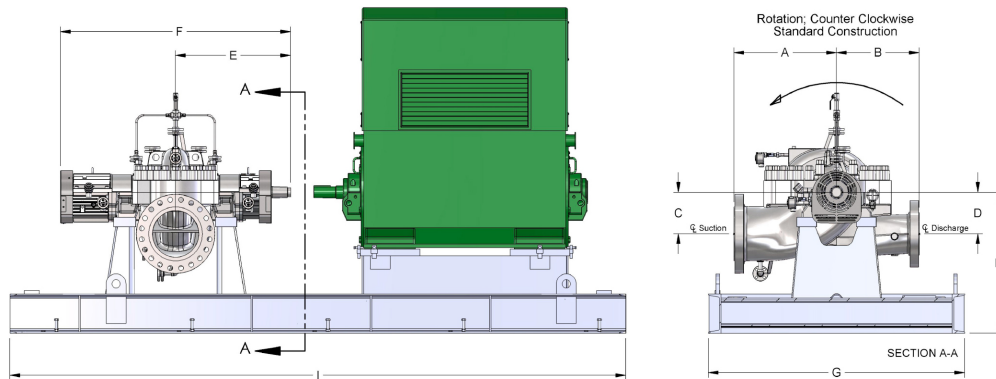

NOTES:

1. All dimensions are in inches. Dimensions are not certified for construction.
2. Standard construction flange rating 600# RF
3. All dimensions based on sleeve bearing / ball thrust housings with fan cooling.
- *4. For clockwise rotation - suction and discharge are on opposite sides in End View
5. Dimensions "I", & "G" may vary with driver selection.
- **6. Add 6" to "H", and add 54" to "I" for auxiliary lube system.
- ***7. Estimated skid weight is based on minimum length and width, and is not applicable for systems with an auxiliary lube system.

Size	*Independent of Rotation				CW & CCW Rotations		Baseplate			Weights (lbs.)	
	A	B	C	D	E	F	G	**H	**I	Pump	***Skid
4x6x13	17.00	17.00	8.00	8.00	24.50	50.25	44	32	144	850	3550
6x8x13	23.00	20.00	11.00	9.00	25.75	51.75	56	37	144	1,200	4000
8x10x13	25.00			11.00	32.50	64.50	60	39	156	2,200	4300
8x10x15	26.00	22.00	12.00	12.00	32.00	64.00	62	40	156	2,600	4400
8x10x16					33.50	66.50	62	40	156	2,600	4400
10x12x15	28.00	25.00	13.00	13.00	33.25	66.25	66	43	156	3,000	4600
10x12x19			14.00	14.00	33.00	65.00	66	44	156	3,500	4600
10x12x25	30.00	27.00	17.00	17.00	33.50	66.00	70	47	156	4,200	4800
10x14x16	28.00	25.00	13.00	13.00	34.81	69.56	66	45	156	4,000	4600
10x14x19	30.00	26.00	15.00		33.50	66.00	70	47	156	4,600	4800
12x12x15			14.00	14.00			70	44	162	4,400	4900
12x14x16	32.00	30.00	15.00	15.00	39.00	70.00	70	46	174	6,700	5050
12x14x19						79.50	74	47	162	6,800	5100
14x14x15	34.00		16.00	16.00	35.50	70.00	78	47	162	6,600	5350
14x14x16							78	47	162	6,600	5350
14x14x19						78	48	168	7,000	5450	
14x14x21	38.00	32.00	17.00	17.00	38.00	80.00	86	49	174	7,200	5900
14x16x21						80.00	86	51	174	8,300	5900
14x16x25					42.00	83.00	86	51	174	8,800	5900
16x16x19					16.00	16.00	43.50	86.00	86	50	174
16x16x25			18.00	18.00	85.00	86		52	174	9,000	5900
16x18x21	42.00	34.00	21.00	21.00		94		57	174	8,700	6400
16x18x27		36.00				94	57	174	9,300	6400	
16x18x30	44.00	34.00			44.00	86.00	94	57	174	12,700	6400
16x20x25		36.00	98	59			180	11,200	6700		
18x20x30			98	62			180	12,500	6900		
18x20x32					98	62	180	13,600	6900		
20x20x34	46.00	38.00	24.00	24.00	45.25	88.50	102	62	180	14,200	7100
20x24x30			26.00	26.00			102	66	180	13,800	7100
24x24x25							102	66	180	12,000	7300
24x24x30							102	68	180	14,500	7300
24x24x32							102	68	180	16,200	7300
24x24x35	52.00	48.00	27.00	27.00	48.75	98.50	114	69	192	19,600	8100

PWD API 610 BB1 SINGLE STAGE PUMP

TECHNICAL DATA

PUMP SIZE	Case Min. Thick	Max. Hydro Test	STANDARD SHAFT DIMENSIONS						Ball Bearing Sizes		Sleeve Ball	Sleeve Pivot Shoe	Rated RPM	Max. BHP/ 100 RPM	Cplg. Fit Taper / Foot	Stuffing Box Dim.			Gland BC
			Imp.	Stuff. Box	Slv. Brg.	Ball Thrust Brg.	Radial Ball Brg.	Cplg.	Thrust Brg. Size	Radial Brg. Size	Thrust Brg. Size	Pivot Shoe. Size				Bore	Face to 1st Obstruction		
																	Int.	Ext.	
4x6x13	.50	2220	2.13	1.88	1.88	1.77	1.77	1.88	7309	6309	7310	5-JHJ		11.5		4.75	3.38	4.38	6.31
6x8x13			2.25	2.00	2.00			1.97		2.00				6310		17.1	4.75	3.38	4.38
8x10x13	2.50		2.25	2.25	1.97	2.16	2.25	7310	6311			3560	22.5	5.19	3.38	4.38	6.69		
8x10x15	2.75		2.50	2.50			2.50						26.1	5.19	3.38	4.38	6.69		
8x10x16	3.00		2.75	2.75			2.75						37.6	5.19	3.38	4.38	6.69		
10x12x15	3.25		3.00	3.00			3.00						49.2	5.50	3.38	4.38	7.13		
10x12x19	3.63		3.38	3.38			3.38			84.3	6.31	4.50	4.88	8.00					
10x12x25	.69		3.63	3.38	3.38		3.38			1780	79.8	6.31	4.50	4.88	8.00				
10x14x16			3.75	3.50	3.50		3.50				64.6	6.31	4.50	4.88	8.00				
10x14x19	3.75		3.50	3.50		3.50	91.3			6.31	4.50	4.88	8.00						
12x12x15			3.50	3.25	3.25		3.25			7313	6-JHJ	3560	60.1	6.31	4.50	4.88	8.00		
12x14x16			3.50	3.25	3.25		3.25	76.5	6.31				4.50	4.88	8.00				
12x14x19	.81		4.00	3.75	3.75		3.75	102.8	6.75				5.50	5.13	8.75				
14x14x15			3.75	3.50	3.50		3.50	89.0	6.31				4.50	4.88	8.00				
14x14x16	.94		3.88	3.63	3.63		3.63				98.3	6.75	5.50	5.13	8.75				
14x14x19			4.50	4.25	4.25		4.25				155.7	7.13	5.50	5.25	8.88				
14x14x21			4.00	3.75	3.75		3.75				84.3	6.75	5.50	5.13	8.75				
14x16x21			4.00	3.75	3.75	N/A	N/A				3.75	N/A	N/A	98.3	6.75	5.50	5.13	8.75	
14x16x25	1.00		4.00	3.75	3.75		3.75				106.4	6.75	5.50	5.13	8.75				
16x16x19			4.50	4.25	4.25		4.25				177.0	7.13	5.50	5.25	8.88				
16x16x25			4.25	4.00	4.00		4.00				134.4	7.13	5.50	5.25	8.88				
16x18x21			3.88	3.63	3.63		3.63				99.4	6.75	5.50	5.13	8.75				
16x18x27	1.00		4.75	4.50	4.50		4.50				215.1	7.50	5.50	5.56	9.25				
16x18x30			4.13	3.88	3.88		3.88				123.0	7.13	5.50	5.25	8.88				
16x20x25	1.00		5.25	4.75	4.75		4.75				172.4	7.50	6.00	4.88	9.50				
18x20x30	1.13		5.25	4.75	4.75		4.75				221.3	7.50	6.00	4.88	9.50				
18x20x32		5.25	4.75	4.75		4.75	268.9				7.50	6.00	4.88	9.50					
20x20x34	1.25	5.75	5.50	5.50		5.50	7317				7-JHJ	1780	373.0	7.50	6.00	4.88	9.50		
20x24x30		5.75	5.50	5.50		5.50		319.4	7.50	6.00			4.88	9.50					
24x24x25	1.50	5.00	4.75	4.75		4.75		236.5	7.50	5.50			5.56	9.25					
24x24x30		6.00	5.50	5.50		5.50		418.3	8.75	6.00			5.00	10.88					
24x24x32		6.00	5.50	5.50		5.50	384.8	8.75	6.00	5.00	10.88								
24x24x35		6.13	5.50	5.50		5.50	429.1	8.75	6.00	5.00	10.88								

NOTES:

1. All dimensions are in inches.
2. Hydrotest pressures based on standard 600# flange rating, at 1 1/2 maximum working pressure at 100°F for WCB material
3. Max BHP/100 RPM based on 7500# torsional shaft stress



PumpWorks • www.pumpworks.com

65 Southbelt Industrial Boulevard, Houston Texas 77047 . Ph. 1.888.405.0209 Fax 713.956.2141

www.pumpworks.com • twitter: @PumpWorks

PWD6PG-100 11.2018