

PWA-IL

ANSI/ASME
B73.2 IN-LINE
PROCESS
PUMP



 Engineered, Assembled, & Tested in the USA



COMPETITIVE ADVANTAGES

| Carbon Steel vs. Ductile Iron

High-strength, impact resistant Carbon Steel liquid ends for improved durability and pressure containment at no additional cost.

Replaces non-repairable, ductile iron casing and impellers, with repairable carbon steel, for extended component life.

Flange Arrangement Options

Standard ANSI class 150# flange pressure rating, flat or raised face design, provided to meet customer specified requirements at no additional cost.

Optional ANSI class 300# flange (375 PSI MAWP), flat or raised face design, provided at no additional cost.



| Additional Features

Installs like a valve, providing for a small dimensional foot print and reduced installation costs.

Flexible, elastomeric spacer coupling provided as standard.

Superior high-strength carbon steel motor support with machined registered fit, accommodates vertical C-face NEMA electric motors. Simplifies field coupling alignment.

External impeller adjustment.

Rotating element can be removed without disturbing the motor or piping.

Optional carbon steel motor support to accommodate IEC motors.

| Seal Chamber/Sealing Solutions

Multiple seal chambers for maximum sealing flexibility for all process applications.

Accommodates all mechanical seal manufacturer's component and ANSI cartridge seal configurations.

Supports the full array of CPI seal support system options.

Ensures superior leak protection with maximum heat dissipation, maximizing seal life and pump reliability.

| Power Frame Superiority

Superior high-strength carbon steel vs. inferior cast iron power frame, adapter and bearing housing material.

Addresses environmental and safety concerns.

Exclusive finned bearing frame for maximum heat dissipation.

Upgraded 316 L SS vs. 4140 steel pump shaft is standard at no additional cost.

Grease lubricated bearing standard, with 'greased for life' and oil mist lubrication optional.

Internal surfaces cleaned, rust preventative applied, and enamel coated assuring internal casting cleanliness.




Standard Bore



Tapered Bore



Big Bore



Component Seal



Single Cartridge Seal



Dual Cartridge Seal

5 Year Unconditional Power Frame Warranty is standard at no additional cost.



LEVERAGING TECHNOLOGY

| PumpWorks leverages technology by providing:

- Superior manufacturing capabilities.
- Extensive inventory selection.
- Professional, reliable service.



| Manufacturing

All of our pumps are engineered, inspected, assembled and tested in the United States of America. This ensures consistent quality, product availability, and low cost of ownership.



| Inventory

Pump and component inventory in a variety of material options are strategically located through the Northern Hemisphere ensuring consistent, rapid shipment tailored to customer requirements.



| Service

Fully staffed professional sales and service teams providing superior customer support is available 24/7/365.

| Delivery

Pump components strategically inventoried for rapid shipment in a variety of material options.




ePOD (Electronic Pump On Demand) is a browser-based front end software application allowing the end user and specifiers to intelligently select their own pump on the web.

ePOD software quickly delivers:

- Performance curves
- Comprehensive data sheets


Test drive ePOD at our website www.pumpworks.com today.

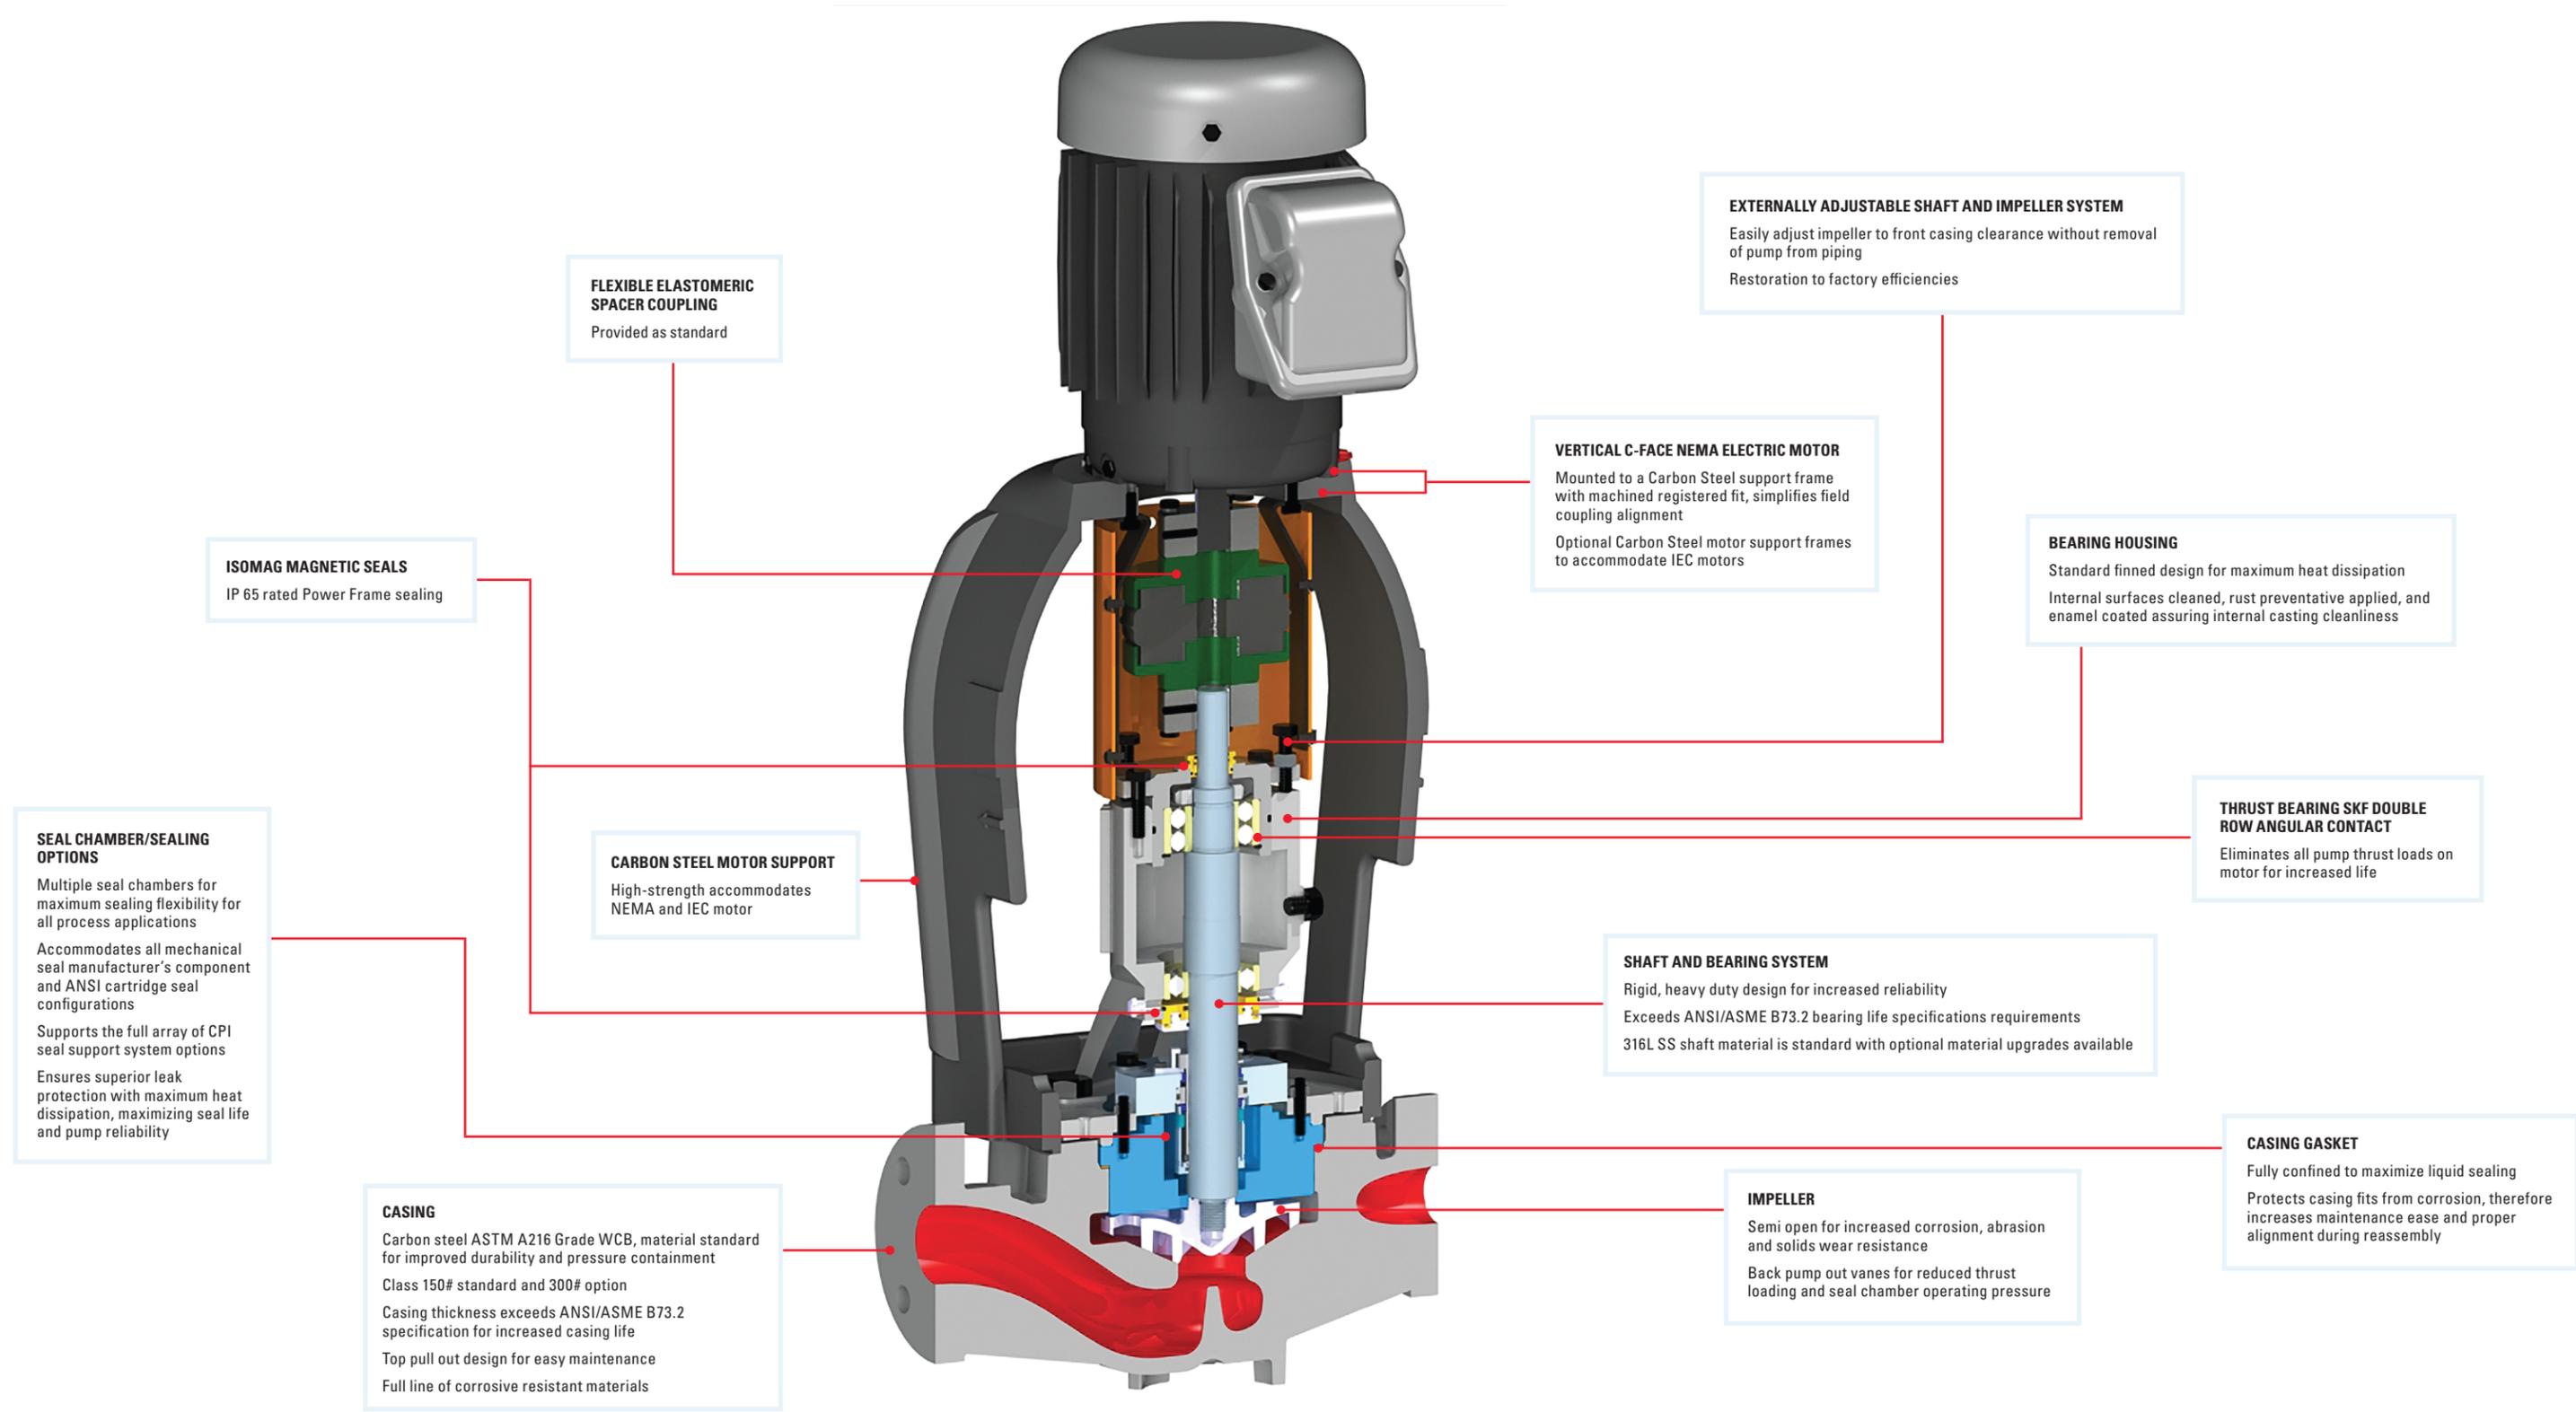




HYDRAULIC PERFORMANCE COVERAGE

60 Hz Performance Coverage

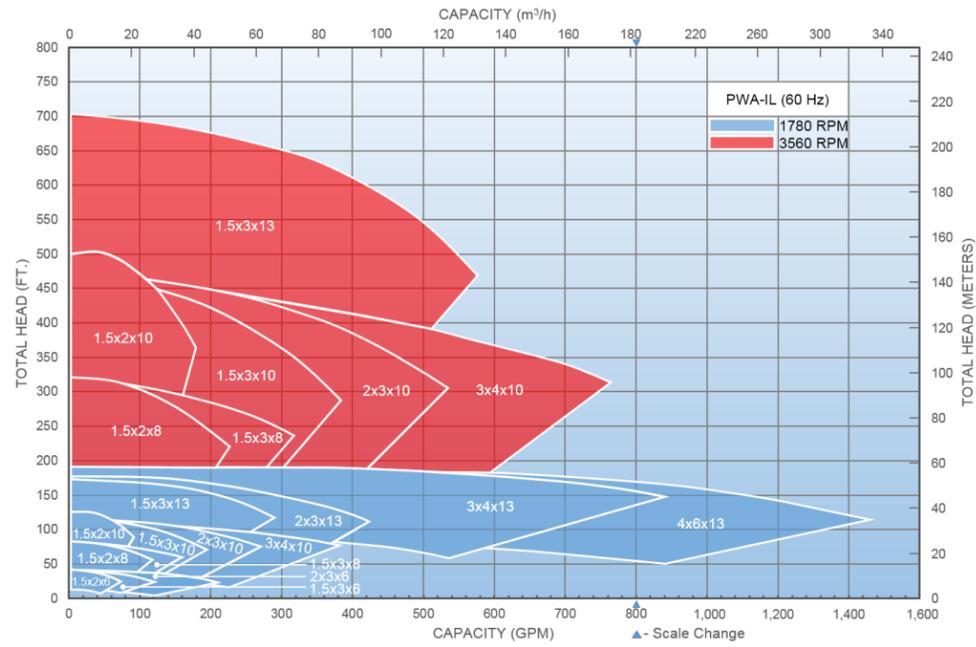


50 Hz Performance Coverage

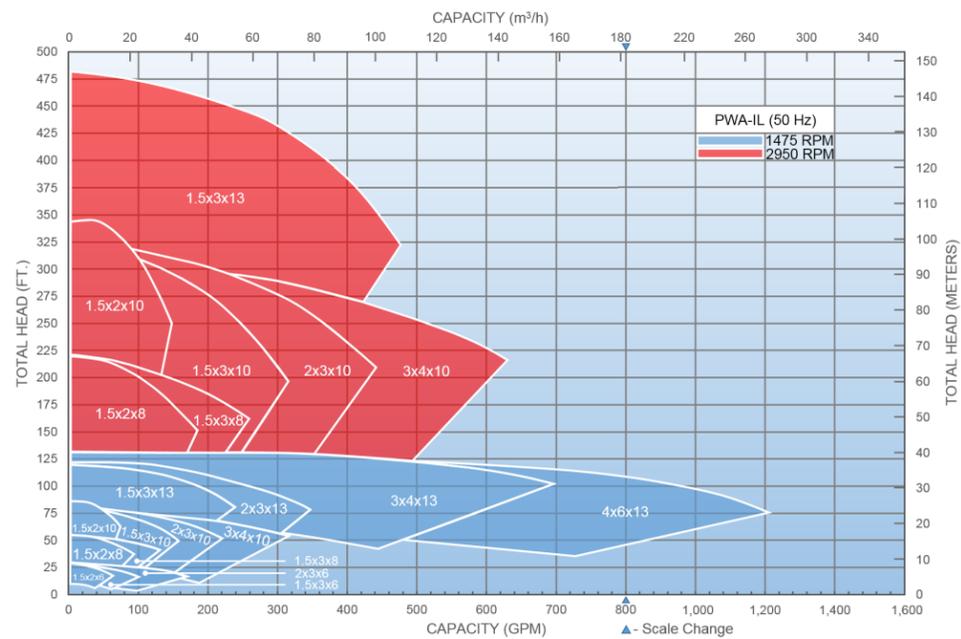

Performances shown are nominal and are to be used for preliminary selection only.

PUMP DIMENSIONS & WEIGHTS

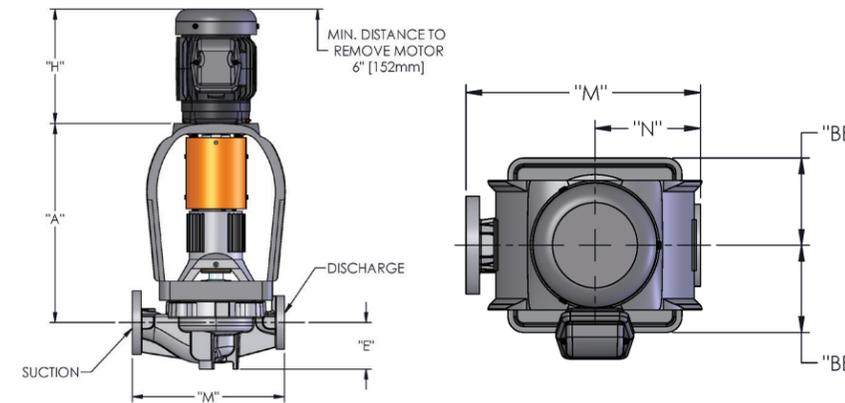

NEMA MOTOR FRAME	H	WEIGHT lbs (kg)
145TC	12.5 (318)	106 (50)
182TC	15.25 (386)	112 (52)
184TC	15.25 (386)	128 (58)
213TC	15.25 (386)	197 (89)
215TC	18.5 (470)	226 (103)
254TC	20.5 (521)	375 (170)
256TC	20.5 (521)	412 (187)
284TSC	22.6 (574)	495 (225)
286TSC	27.5 (692)	519 (235)
324TSC	30.0 (760)	700 (318)
326TSC	30.0 (760)	756 (343)
364TSC	30.5 (775)	948 (430)
365TSC	32.0 (814)	1009 (458)
404TSC	34.5 (873)	1150 (500)
405TSC	39.25 (996)	1330 (603)

FRAME	SIZE	ANSI DESIGNATION	DISCHARGE SIZE	SUCTION SIZE	E	M	N	BE	WEIGHT BARE PUMP lbs (kg)
GROUP 1	1.5 x 2 x 6	2105/15	1.5	2	4.25 (108)	15 (381)	6.75 (171)	6.375 (162)	190 (86)
	1.5 x 3 x 6	3015/15	1.5	3	4.875 (124)	15 (381)	6.75 (171)		200 (91)
	2 x 3 x 6	3020/17	2	3	4.625 (118)	17 (432)	7.5 (191)		205 (93)
	1.5 x 2 x 8	2015/17	1.5	2	4.8125 (122)	17 (432)	8 (203)		200 (91)
	1.5 x 3 x 8	3015/19	1.5	3	5.25 (133)	19 (483)	8.375 (213)		210 (95)
GROUP 2	1.5 x 2 x 10	2015/19	1.5	2	5.125 (130)	19 (483)	9.25 (235)	10 (254)	370 (168)
	1.5 x 3 x 10	3015/19	1.5	3	5 (127)	19 (483)	9.25 (235)		380 (173)
	2 x 3 x 10	3020/20	2	3	5.25 (133)	20 (508)	9.5 (241)		390 (177)
	3 x 4 x 10	4030/25	3	4	6 (152)	25 (635)	11.5 (292)		430 (195)
	1.5 x 3 x 13	3015/24	1.5	3	5.625 (143)	24 (610)	11.5 (292)		460 (209)
	2 x 3 x 13	3020/24	2	3	5.75 (146)	24 (610)	11.5 (292)		490 (223)
	3 x 4 x 13	4030/28	3	4	6.875 (175)	28 (711)	13 (330)		520 (236)
	4 x 6 x 13	6040/30	4	6	8.5 (216)	30 (762)	14 (356)		610 (277)

All dimensions in inches (mm). All weights in lbs. (kg). Not to be used for construction unless certified by manufacturer.

MOTOR SUPPORT DIMENSIONS & WEIGHTS

FRAME	SIZE	A DIMENSION															
		NEMA MOTOR FRAME SIZE															
		143 TC - 145 TC	WEIGHT	182 TC - 184 TC	WEIGHT	213 TC - 215 TC	WEIGHT	254 TC - 256 TC	WEIGHT	284 TSC - 286 TSC	WEIGHT	324 TSC - 326 TSC	WEIGHT	364 TSC - 365 TSC	WEIGHT	404 TSC - 4045 TSC	WEIGHT
GROUP 1	1.5 x 2 x 6	19.5 (517)	74 (164)	21.5 (570)	108 (239)	21.5 (570)	102 (225)	21.5 (570)	102 (225)	21.5 (570)	102 (225)	—	—	—	—	—	—
	1.5 x 3 x 6	19.5 (517)	103 (228)	21.4 (567)	113 (250)	21.4 (567)	113 (250)	21.4 (567)	113 (250)	21.4 (567)	114 (252)	21.4 (567)	116 (256)	—	—	—	—
	2 x 3 x 6	19.5 (517)	103 (228)	21.4 (567)	113 (250)	21.4 (567)	113 (250)	21.4 (567)	113 (250)	21.4 (567)	114 (252)	21.4 (567)	116 (256)	—	—	—	—
GROUP 2	1.5 x 2 x 10	25.8 (682)	148 (327)	27.6 (730)	178 (393)	27.6 (730)	178 (393)	27.6 (730)	178 (393)	27.8 (735)	175 (387)	27.8 (735)	190 (420)	27.8 (735)	190 (420)	27.8 (735)	190 (420)
	1.5 x 3 x 10	25.8 (682)	148 (327)	27.6 (730)	178 (393)	27.6 (730)	178 (393)	27.6 (730)	178 (393)	27.8 (735)	175 (387)	27.8 (735)	190 (420)	27.8 (735)	190 (420)	27.8 (735)	190 (420)
	2 x 3 x 10	25.8 (682)	148 (327)	27.6 (730)	178 (393)	27.6 (730)	178 (393)	27.6 (730)	178 (393)	27.8 (735)	175 (387)	27.8 (735)	190 (420)	27.8 (735)	190 (420)	27.8 (735)	190 (420)
	3 x 4 x 10	25.8 (682)	148 (327)	27.6 (730)	178 (393)	27.6 (730)	178 (393)	27.6 (730)	178 (393)	27.8 (735)	175 (387)	27.8 (735)	190 (420)	27.8 (735)	190 (420)	27.8 (735)	190 (420)
	1.5 x 3 x 13	25.8 (682)	214 (473)	27.3 (724)	214 (473)	27.3 (724)	214 (473)	27.3 (724)	214 (473)	26.8 (762)	213 (471)	29.7 (787)	226 (500)	29.7 (787)	226 (500)	29.7 (787)	226 (500)
	2 x 3 x 13	25.8 (682)	214 (473)	27.3 (724)	214 (473)	27.3 (724)	214 (473)	27.3 (724)	214 (473)	26.8 (762)	213 (471)	29.7 (787)	226 (500)	29.7 (787)	226 (500)	29.7 (787)	226 (500)


All dimensions in inches (mm). All weights in lbs. (kg).




PARTS LIST & MATERIALS OF CONSTRUCTION

Table with 13 columns: Item Ref #, Part Name, Carbon Steel, Carbon Steel w/316L SS Impeller, 316L SS, CA6NM (12% Chrome), Duplex SS CD4 Gr1B, Super Duplex SS CD4 Gr5A, Alloy 20, Monel, Nickel, Hastelloy B, C, & G, Titanium. Rows include parts like Casing, Impeller, Lantern Ring, Packing, Thrust Bearing, Shaft, etc.

Group 1 Sectional View PWA-IL

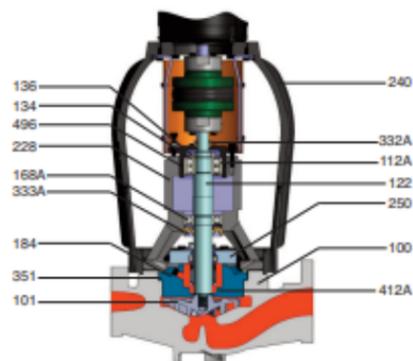

Group 2 Sectional View PWA-IL

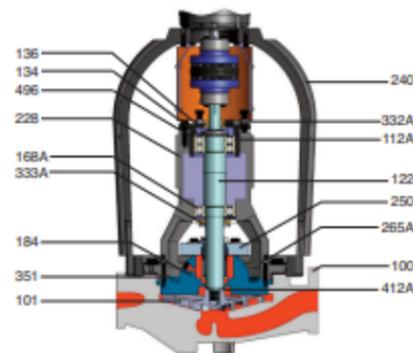

TECHNICAL DATA

All dimensions in inches (mm).

Table with 4 columns: Part Name, Dimension, GP1, GP2. Rows include Shaft* (Shaft Diameter at Impeller, Diameter in Stuffing Box, etc.), Sleeve*, Bearings, Large Bore Seal Chamber*, Stuffing Box*, Maximum Power Limits, Maximum Allowable Working Pressure, Maximum Temperature, and Casing.

Notes:

1. Hydro-static test pressure equal to 1.5 times Maximum Allowable Working Pressure.

*Shaft, sleeve, seal chamber and impeller interchangeable with Model PWA Group 1 and 2 pumps.

**Consult pressure temperature chart for various temperatures.

Test Facilities

- Test flows up to 7,500 GPM.
• Discharge test pressures up to 740 PSI.
• Supply tank rated from full vacuum to 65 psi.
• 460 volt through 500 HP, 3600 RPM.
• Variable Frequency Drive for precise speed control through 500 HP @ 460 volt.

Typical Industries

- Chemical/Petrochemical
• Pulp and Paper
• Food and Beverage
• Oil and Gas
• Primary Metals Manufacturing
• Mining
• Power Generation
• Waste Treatment
• General Industrial



See our Test Facilities Brochure for more information.



Pumpworks | pumpworks.com

